

Product Discontinuation Notices

Common Accessories

Issue Date
May 7, 2013

No. 2013029CE

Discontinuation Notice of Back-connecting Sockets PY14(QN)-3 series.

Product Discontinuation

Back-connecting Socket

Model PY14(QN)-3 FOR MY



Model PY14QN-3-M FOR MY
Model PY14QN-3-MS



Recommended Replacement

Back-mounting Socket

Model PY14(QN) FOR MY
(use 3 pieces)

Model PY14QN FOR MY
(use 3 pieces)

[Discontinuation date]

The end of March, 2014

[Caution on recommended replacement]

Please use 3 pieces of Back-connecting socket PY14(QN) FOR MY for a replacement.

Please note that PY14(QN) FOR MY does not have a check terminal for operation check.

Dimensions and Mounting dimensions are also different.

Please refer to the following table.

[Difference from discontinued product]

Recommended replacement Model	Body Color	Dimensions	Wire connection	Mounting Dimensions	Characteristics	Operation ratings	Operation methods
Model PY14 FOR MY	◎	×	◎	×	◎	/	/
Model PY14QN FOR MY	◎	×	◎	×	◎	/	/

** : Compatible

* : The change is a little/Almost compatible

-- : Not compatible

- : No corresponding specification

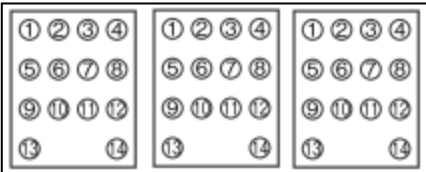

[Product Discontinuation and recommended replacement]

Product discontinuation	Recommended replacement
Model PY14-3 FOR MY	Model PY14 FOR MY (use 3 pieces)
Model PY14QN-3 FOR MY	Model PY14QN FOR MY (use 3 pieces)
Model PY14QN-3-M FOR MY	Model PY14QN FOR MY (use 3 pieces)
Model PY14QN-3-MS	Model PY14QN FOR MY (use 3 pieces)



[Body color]

Product discontinuation Model PY14(Q)-3 FOR MY Model PY14QN-3-M FOR MY Model PY14QN-3-MS	Recommendable replacement Model PY14(QN) FOR MY
Black	Black

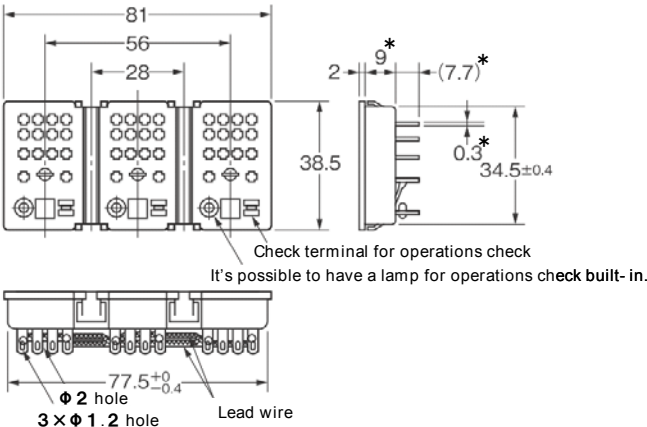
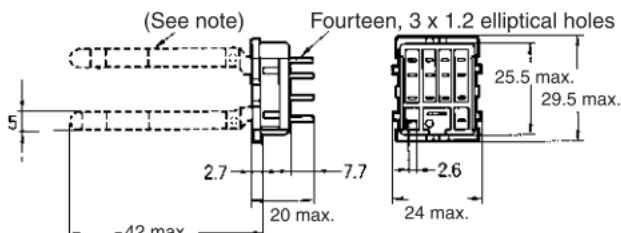
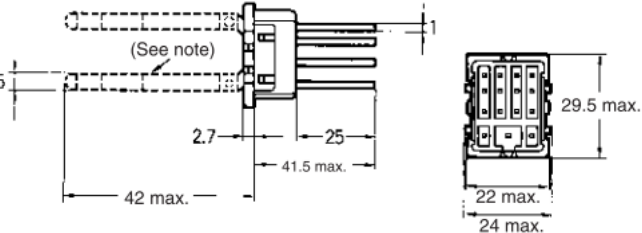
[Wire connection]

<p>Product discontinuation Model PY14(QN)-3 FOR MY Model PY14QN-3-M FOR MY Model PY14QN-3-MS</p>	<p>Recommendable replacement Model PY14(QN) FOR MY</p>
<p>Internal connections</p>  <p><BOTTM VIEW></p>	<p>Internal connections</p>  <p><BOTTOM VIEW></p>

[Mounting dimensions]

<p>Product discontinuation Model PY14(QN)-3 FOR MY Model PY14QN-3-M FOR MY Model PY14QN-3-MS</p>	<p>Recommendable replacement Model PY14(QN) FOR MY</p>
<p>Mounting dimensions</p> 	<p>Mounting dimensions</p> 

[Dimensions]

<p>Product discontinuation Model PY14(QN)-3 FOR MY Model PY14QN-3-M FOR MY Model PY14QN-3-MS</p>	<p>Recommendable replacement Model PY14(QN) FOR MY</p>
<p>Dimensions</p>  <p>Check terminal for operations check It's possible to have a lamp for operations check built-in.</p> <p>φ 2 hole 3 x φ 1.2 hole Lead wire</p> <p>* Since PY14QN-3 FOR MY is a Wire-wrap terminal type socket, height of Base and length of Terminals are different from above drawing.</p>	<p>Dimensions Model PY14</p>  <p>(See note) Fourteen, 3 x 1.2 elliptical holes</p> <p>25.5 max. 29.5 max. 2.6 2.7 7.7 20 max. 24 max. -42 max.</p> <p>Note: The PY14-Y1 includes sections indicated by dotted lines.</p> <p>Model PY14QN</p>  <p>(See note)</p> <p>29.5 max. 2.2 max. 24 max. 2.7 25 41.5 max. 42 max.</p> <p>Note: The PY14QN-Y1 includes sections indicated by dotted lines.</p>

[Characteristics]

Item	Product discontinuation Model PY14(QN)-3 FOR MY Model PY14QN-3-M FOR MY Model PY14QN-3-MS	Recommendable replacement Model PY14(QN) FOR MY
Rated carry current	3 A	3 A
Direct strength	1,500 VAC 50/60 Hz for 1 min	1,500 VAC 50/60 Hz for 1 min
Insulation resistance	100 MΩ min. (at 500 VDC)	100 MΩ min. (at 500 VDC)

Specifications and prices in this product news are as of the issue date and are subject to change without notice.
Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.